

Section C2
Table of Contents

PW250
PANELIZED CURTAIN WALL

2½" x 6¼"
for ¼" Glass

Specifications - PW250	S1-S5
Features & Benefits	1
Standard Framing - Captured System	2
Corner Framing - Captured System	3
Standard Framing - Structural Silicone Glazed System	4
Entrance Framing	5

Page Left Intentionally Blank

GUIDE SPECIFICATION

Manufacturer:
Coral Architectural Products
3010 Rice Mine Road
Tuscaloosa, AL. 35406
Voice: (800) 772-7737
Fax: (800) 443-6261

SECTION 08900 ALUMINUM CURTAIN WALL

This suggested guide specification has been developed using the current edition of the Construction Specifications Institute (CSI) "Manual of Practice," including the recommendations for the CSI 3 Part Section Format and the CSI Page Format. The developmental concept and organizational arrangement used by the American Institute of Architects (AIA) MASTERSPEC Program were recognized in the preparation of this guide specification. Neither CSI nor AIA endorse specific manufacturers and products. The preparation of the guide specification assumes the use of standard contract documents and forms, including the "Conditions of the Contract," published by the AIA.

PART 1 – GENERAL

1.01 Summary

- A. Section Includes: Coral Architectural Products™, including perimeter trims, stools, accessories, shims and anchors, and perimeter sealing of storefront framing.
- 1. Types of Coral Architectural Products include:
 - a. Series PW250 Panelized Curtain Wall System: 2-1/2" x 6-1/4" outside glazed captured pressure wall system for 1/4" glazing infill. (Select)
 - b. Series PW250 Panelized Curtain Wall System: 2-1/2" x 6-1/4" outside glazed (SSG) structural silicone glazed pressure wall system for 1/4" glazing infill. (Select)
- B. Related Sections:
 - 1. Division 7 Section "Vapor Barriers" between glazed wall systems and adjacent construction
 - 2. Division 7 Section "Fire Stopping"
 - 3. Division 7 Section "Joint Sealants" for joint sealants installed as part of aluminum entrance and storefront system
 - 4. Division 8 Section "Glazed Aluminum Curtain Walls"
 - 5. Division 8 Section "Aluminum Windows Walls"
 - 6. Division 8 Section "Aluminum Entrances and Storefronts"
 - 7. Division 8 Section "Aluminum Mall Sliding Doors"
 - 8. Division 8 Section "Finish Hardware"
 - 9. Division 8 Section "Glass and Glazing"

EDITOR NOTE: REFER TO INDEX FOR ANY AND ALL APPLICABLE STANDARDS.

1.02 References (Industry Standards)

1.03 System Description

- A. Storefront System Performance Requirements:
 - 1. Wind loads: Provide framing system; include anchorage, capable of withstanding wind load design pressures of () P.S.F. inward () P.S.F. outward. The design pressures are based on the () Building Code; () Edition.
 - 2. Air Infiltration: The test specimen shall be tested in accordance with ASTM E 283. Air infiltration rate shall not exceed 0.06 cfm/ft² at a (static) air pressure differential of 6.24 PSF.
 - 3. Water Resistance (static): The test specimen shall be tested in accordance with ASTM E 331 for (outside) or (inside). There shall be no leakage at a minimum static air pressure differential of 13 PSF as defined in AAMA 501.
 - 4. Uniform Load: A static air design load of 65 PSF shall be applied in the positive and negative direction in accordance with ASTM E 330. There shall be no deflection in excess of L/175 of the span of any framing member at design load. At structural test load equal to 1.5 times the specified design load, no glass breakage or permanent set in the framing members in excess of 0.2% of their clear spans shall occur.

GUIDE SPECIFICATION

1.04 Submittals

- A. General: Prepare, review, approve, and submit specified submittals in accordance with "Conditions of the Contract" and Division 1 Submittals Sections. Product data, shop drawings, samples and similar submittals are defined in "Conditions of the Contract."
- B. Quality Assurance/Control Submittals:
 - 1. Test Reports: Submit certified test reports showing compliance with specified performance characteristics.

1.05 Warranty

- A. Project Warranty: Refer to "Conditions of the Contract" for project warranty provisions.
- B. Manufacturer's Product Warranty: Submit, for Owner's acceptance, manufacturer's warranty for storefront system as follows:
 - 1. Warranty Period: Two (2) years from Date of Substantial Completion of the project. The Limited Warranty shall begin in no event later than six months from date of initial shipment by Coral Architectural Products without regard to the date selected as substantial completion.

1.06 Quality Assurance

- A. Qualifications:
 - 1. Installer Qualifications: Installer experienced (as determined by contractor) to perform work of this section who has specialized in the installation of work similar to that required for this project and who is acceptable to product manufacturer.
 - 2. Manufacturer Qualifications: Manufacturer capable of providing field service representation during construction, approving acceptable installer and approving application method.
- B. Pre-Installation Meetings: Conduct pre-installation meeting to verify project requirements, substrate conditions, manufacturer's installation instructions and manufacturer's warranty requirements.

1.07 Delivery, Storage, and Handling

- A. Ordering: Comply with manufacturer's ordering instructions and scheduling requirements to avoid construction delays.
- B. Packing, Shipping, Handling and Unloading: Deliver materials in manufacturer's original, unopened, undamaged containers with identification labels intact.
- C. Storage and Protection: Store materials protected from exposure to harmful weather conditions. Handle storefront material and components to avoid damage. Protect storefront material against damage from elements, construction activities and other hazards before, during and after storefront installation.

PART 2 – PRODUCTS

EDITOR NOTE: RETAIN BELOW ARTICLE FOR PROPRIETARY METHOD SPECIFICATION; ADD PRODUCT ATTRIBUTES, PERFORMANCE CHARACTERISTICS, MATERIAL STANDARDS, AND DESCRIPTIONS AS APPLICABLE. DO NOT USE THE PHRASE "OR EQUAL" / "OR APPROVED EQUAL," OR SIMILAR PHRASES. USE OF SUCH PHRASES CAN CAUSE AMBIGUITY IN THE SPECIFICATIONS DUE TO THE DIFFERENT INTERPRETATIONS AMONG THE DIVERGENT PARTIES OF THE CONSTRUCTION PROCESS AND READERS OF THESE SPECIFICATIONS. SUCH PHRASES REQUIRE EXTENSIVE AND COMPLETE REQUIREMENTS (PROCEDURAL, LEGAL, REGULATORY AND RESPONSIBILITY) FOR DETERMINING "OR EQUAL."

2.01 Manufacturers (Acceptable Manufacturers/Products)

- A. Acceptable Manufacturers:
 - 1. Address: Coral Architectural Products, a division of Coral Industries
3010 Rice Mine Road
Tuscaloosa, AL. 35406
Contact Numbers:
 - a. Telephone: (800) 772-7737
 - b. Fax: (800) 443-6261
 - c. Email: info@coralap.com
 - d. Web address: www.coralap.com

GUIDE SPECIFICATION

2. Proprietary Product(s)/System(s): Coral Architectural Products
 - a. Series: PW250 outside glazed pressure wall curtain wall system

EDITOR NOTE: RETAIN BELOW FOR ALTERNATE MANUFACTURERS/PRODUCTS AS SPECIFIED IN THE CONTRACT DOCUMENTS. COORDINATE BELOW WITH BID DOCUMENTS (IF ANY) AND DIVISION 1 ALTERNATES SECTION. CONSULT WITH CORAL ARCHITECTURAL PRODUCTS FOR RECOMMENDATIONS ON ALTERNATE MANUFACTURERS AND PRODUCTS MEETING THE DESIGN CRITERIA AND PROJECT REQUIREMENTS. CORAL ARCHITECTURAL PRODUCTS RECOMMENDS OTHER MANUFACTURERS REQUESTING APPROVAL TO BID THEIR PRODUCT AS AN EQUAL, MUST SUBMIT THEIR REQUEST IN WRITING (10) DAYS PRIOR TO CLOSE OF BIDDING.

- b. Finish/Color: (See 2.06 Finishes)
 - c. Framing Member Profile: 2-1/2 x 6-1/4" nominal dimension; pressure bar; screw-spline fabrication
- B. Alternate (Manufacturers/Products): In lieu of providing below specified base bid/contract manufacturer, provide below specified alternate manufacturers. Refer to Division 1 Alternates Section.
 1. Base Bid/Contract Manufacturer/Product: Coral Architectural Products
 - a. Product: Architectural Aluminum
 - b. Series PW250 Panelized System: 2-1/2" x 6-1/4" nominal dimension; pressure bar; screw-spline fabrication
- C. Substitutions:
 1. General: Refer to Division 1 Substitutions for procedures and submission requirements.
 - a. Pre-Contract (Bidding Period) Substitutions: Submit written requests ten (10) days prior to bid date.
 - b. Post-Contract (Construction Period) Substitutions: Submit written request in order to avoid storefront installation and construction delays.
 2. Substitution Documentation
 - a. Product Literature and Drawings: Submit product literature and drawings modified to suit specific project requirements and job conditions.
 - b. Certificates: Submit certificate(s) certifying substitute manufacturer, attesting to adherence to specification requirements for storefront system performance criteria.
 - c. Test Reports: Submit test reports verifying compliance with each test requirement for storefront required by the project.
 - d. Product Sample and Finish: Submit product sample, representative of storefront for the project, with specified finish and color.
 3. Substitution Acceptance: Acceptance will be in written form, either as an addendum or modification, and documented by a formal change order signed by the Owner and Contractor.

2.02 Materials

- A. Aluminum (Storefront and Components):
 1. Material Standard: Extruded Aluminum, ASTM B 221, 6063-T6 alloy and temper.
 2. Member Wall Thickness: Each framing member shall have a wall thickness sufficient to meet the specified structural requirements.
 3. Tolerances: Reference to tolerances for wall thickness and other cross-sectional dimensions of storefront framing members are nominal and in compliance with Architectural Aluminum Standards and Data.

2.03 Accessories

- A. Fasteners: Where exposed, shall be Stainless Steel.
- B. Gaskets: Glazing gaskets shall comply with ASTM C 864 and be extruded of silicone compatible EPDM material that provides for silicone adhesion.
- C. Perimeter Anchors: Aluminum; When steel anchors are used, provide insulation between steel material and aluminum material to prevent galvanic action.
- D. Thermal Barrier: Thermal separator shall be extruded of a silicone compatible elastomer that provides for silicone adhesion.

2.04 Related Materials

- A. Sealants: Refer to Joint Treatment (Sealants) Section.
- B. Glass: Refer to Glass and Glazing Section.

GUIDE SPECIFICATION

2.05 Fabrication

A. General:

1. Fabricate components per manufacturer's installation instructions and with minimum clearances and shim spacing around perimeter of assembly, yet enabling installation and dynamic movement of perimeter seal.
2. Accurately fit and secure joints and corners. Make joints flush, hairline and weatherproof.
3. Arrange fasteners and attachments to conceal from view.

2.06 Finishes

EDITOR NOTE: SELECT BELOW FINISH AND COLOR FROM CORAL ARCHITECTURAL PRODUCT'S STANDARD COLORS. CORAL'S POWDER COAT FINISHES ARE HIGH-PERFORMANCE DURABLE FINISHES OFFERING IMPROVED GLOSS RETENTION AND ENHANCED RESISTANCE TO CHALKING AND FADING. CUSTOM COLORS ARE AVAILABLE UPON REQUEST FROM CORAL ARCHITECTURAL PRODUCTS IN A TWO COMPONENT POLYESTER POWDER COAT FINISH CONFORMING TO AAMA 2604 AND (70%) THERMOSETTING FLUOROPOLYMER POWDER COAT FINISH CONFORMING TO AAMA 2605. CONSULT WITH YOUR CORAL SALES OR ARCHITECTURAL REPRESENTATIVE FOR OTHER SURFACE TREATMENTS AND FINISHES.

A. Shop Finishing

1. Color Anodizing Conforming to AA-M12C22A34, AAMA 611, Architectural Class II. Color Anodic Coating (Color: #20 **Dark Bronze**) (Standard) or AA-M12C22A44, AAMA 611, Architectural Class I. Color Anodic Coating (Color: #21 **Dark Bronze**) (Select).
2. Clear Anodizing Conforming to AA-M12C22A31, AAMA 611, Architectural Class II. Clear Anodic Coating (**Clear**: #10) (Standard) or AA-M12C22A41, AAMA 611, Architectural Class I. Clear Anodic Coating (**Clear**: #11) (Select).
3. Two Component Polyester Powder Coating Conforming to AAMA 2604 (Color: _____).
4. (70%) Fluoropolymer Thermosetting Powder Coating Conforming to AAMA 2605 (Color: _____).
5. Other: Manufacturer _____ Type _____ Color: _____).

2.07 Source Quality Control

A. Source Quality: Provide aluminum storefront specified herein from a single source.

1. Building Enclosure System: When aluminum curtain walls are part of a building enclosure system, including entrances, entrance hardware, windows, curtain wall framing and related products, provide building enclosure system products from a single source manufacturer.

PART 3 – EXECUTION

3.01 Examination

- #### A. Site Verification of Conditions: Verify substrate conditions (which have been previously installed under other sections) are acceptable for product installation in accordance with manufacturer's instructions. Verify openings are sized to receive specified system and sill plate is level in accordance with manufacturer's acceptable tolerances.

EDITOR NOTE: COORDINATE BELOW ARTICLE WITH MANUFACTURER'S RECOMMENDED INSTALLATION DETAILS AND INSTALLATION INSTRUCTIONS.

1. Field Measurements: Verify actual measurements/openings by field measurements before fabrication; show recorded measurements on shop drawings. Coordinate field measurements, fabrication schedule with construction progress to avoid construction delays.

3.02 Installation

- #### A. General: Install storefront systems plumb, level and true to line, without warp or rack of frames with manufacturer's prescribed tolerances and installation instructions. Provide support and anchor in place.
1. Dissimilar Materials: Provide separation of aluminum materials from sources of corrosion or electrolytic action contact points.
 2. Glazing: Glass shall be outside glazed and held in place with extruded aluminum pressure bars anchored to the mullion using stainless steel fasteners spaced no greater than 9" on center.

GUIDE SPECIFICATION

3. Water Drainage: Each light of glass shall be compartmentalized by using end dams at horizontal/vertical joint intersections and silicone sealant to divert water to the horizontal weeps. Weep holes shall be located in the horizontal pressure bars and covers to divert water to the exterior of the building.
- B. Related Products Installation Requirements:
 1. Sealants (Perimeter): Refer to Division 7 Joint Treatment (Sealants) Section.
 2. Glass: Refer to Division 8 Glass and Glazing Section.
 - a. Reference: ANSI Z97.1, CPSC 16 CFR 1201 and GANA Glazing Manual.

3.03 Field Quality Control

- A. Field Tests: Architect shall select storefront units to be tested as soon as a representative portion of the project has been installed, glazed, perimeter caulked and cured. Conduct tests for air infiltration and water penetration with manufacturer's representative present. Tests not meeting specified performance requirements and units having deficiencies must be corrected as part of the contract amount.
 1. Testing: Testing shall be performed per AAMA 503 by a qualified independent testing agency. Refer to Division Testing Section for payment of testing and testing requirements.
 - a. Air Infiltration Tests: Conduct tests in accordance with ASTM E 783. Allowable air infiltration shall not exceed 1.5 times the amount indicated in the performance requirements or 0.09 cfm/ft², which, ever is greater.
 - b. Water Infiltration Tests: Conduct tests in accordance with ASTM E 1105. No uncontrolled water leakage is permitted when tested at a static test pressure of two-thirds the specified water penetration pressure but not less than 8 PSF.
- B. Manufacturer's Field Services: Upon Owner's request, provide manufacturer's field service consisting of product use recommendations and periodic site visit for inspection of product installation in accordance with manufacturer's instructions.

3.04 Protection and Cleaning

- A. Protection: Protect installed product's finish surfaces from damage during construction. Protect aluminum storefront system from damage from grinding and polishing compounds, plaster, lime, acid, cement or other harmful contaminants.
- B. Cleaning: Repair or replace damaged installed products. Installed products are to be cleaned in accordance with manufacturer's instructions prior to owner's acceptance. Remove construction debris from project site and legally dispose of debris.

DISCLAIMER STATEMENT

This guide specification is intended for use by a qualified construction specifier. The guide specification is not intended to be verbatim as a project specification without appropriate modifications for the specific use intended. The guide specification must be used and coordinated with the procedures of each design firm and the particular requirements of a specific construction project.

END OF SECTION 08410

FEATURES AND BENEFITS

System Description

Panelized construction using proven screw spline joinery reduces fabrication and installation time. Interior horizontal snap-on trim covers increase quality by allowing inspection and repair of critical horizontal/vertical seals and perimeter anchor attachment to substrate prior to or after glazing.

Framing panels can be shop fabricated, assembled, transported to job site and then coupled together creating a complete panelized curtain wall installation.

Glazing Features:

- Same EPDM dense gasket used on interior and exterior at glass

Screw spline joinery allows:

- Coral Punch die shop fabrication
- Die set punches spline and pressure bar weep holes
- Panelized frame assembly for easy transporting and installation
- Eliminates "T" anchors

Pressure Bars:

- Factory installed EPDM thermal isolator with attachment holes pre-punched 9" O.C.

Interior Snap-on Covers:

- Inspection and/or repair of critical joint seal areas prior to and after glazing
- Perimeter anchor attachment and inspection

Injection molded plastic end dams and bridges at horizontals provide:


- Tight seals at intersection of vertical/horizontal joints for zone glazing

Injection molded plastic top and bottom vertical mullion caps:

- Accurate compression fit
- Provides continuous perimeter seal


Injection molded plastic temporary glazing retainer:

- Reduces labor
- Distributes uniform pressure on glass reducing risk of breaking glass
- Reusable for next project





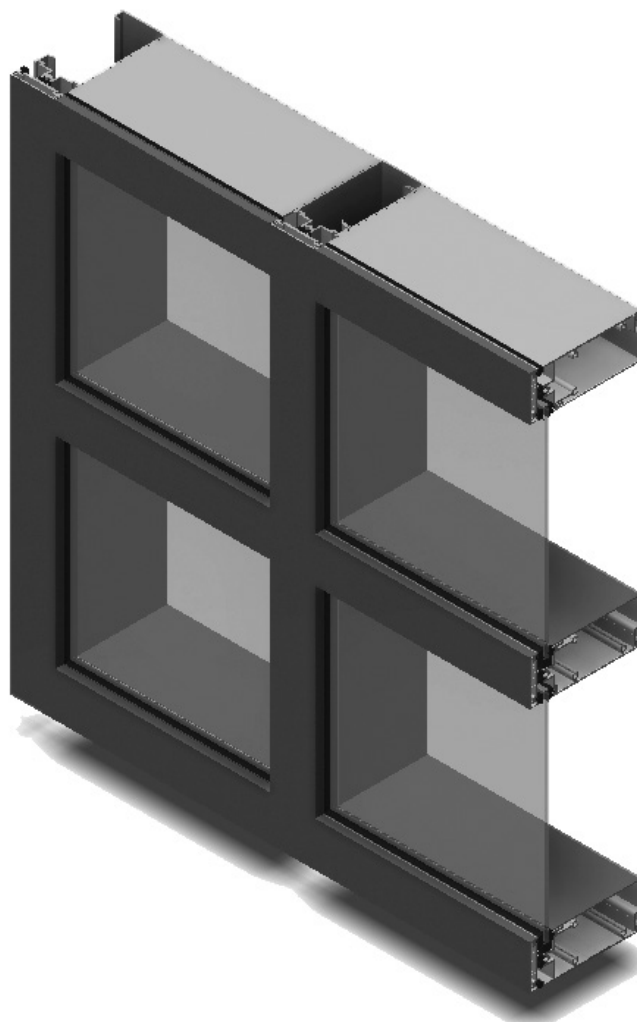


Performance Test Standards

- ASTM E 283 – Air Infiltration Test
- ASTM E 331 – Water Infiltration Test
- ASTM E 330 – Uniform Load Deflection and Structural Test
- Florida Product Approval Number - FL15799 (Non-impact for use outside HVHZ)

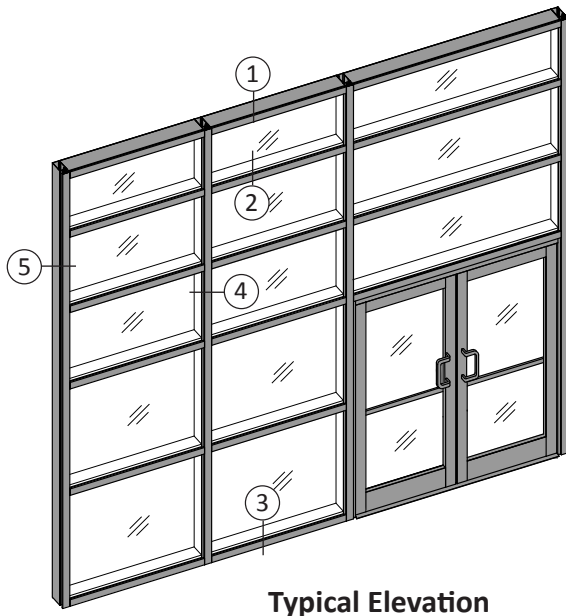


Typical Elevation

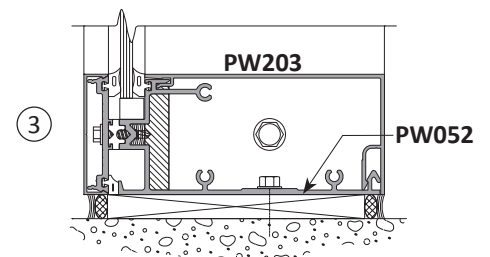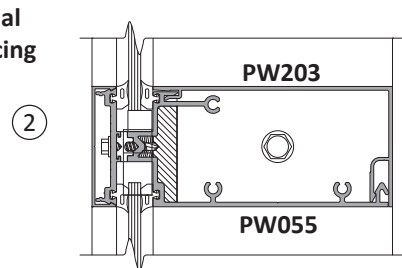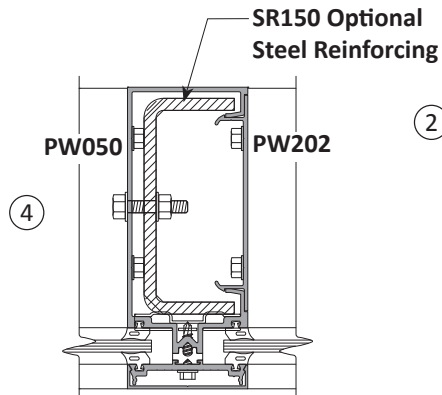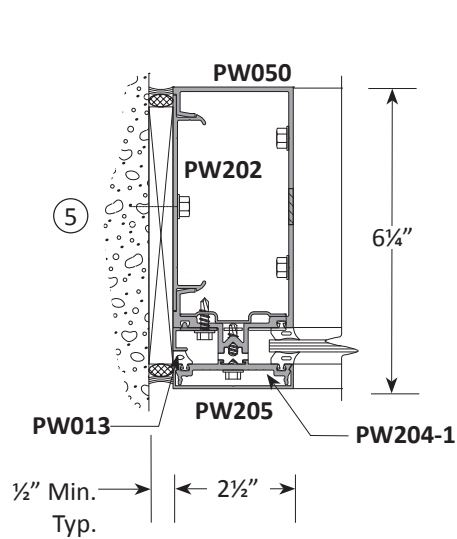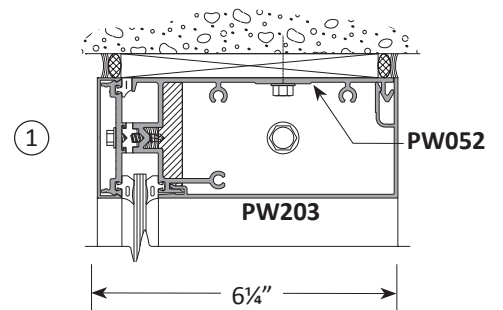


PW250·2½" x 6¼"

Curtain Wall







90° Corner Framing - Captured System
Scale: 3" = 1'-0"

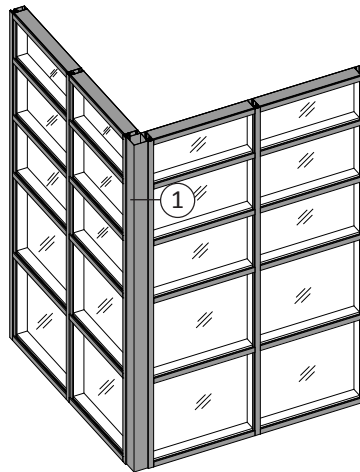

90° Outside Corner Elevation

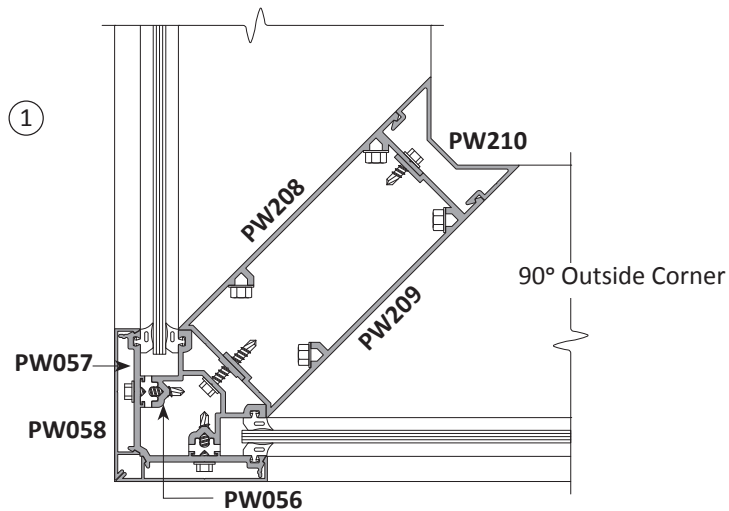

Standard Framing - Structural Silicone Glazed (SSG) System
Scale: 3" = 1'-0"

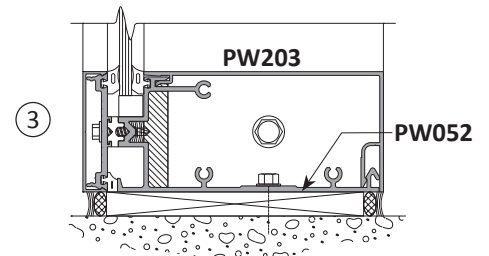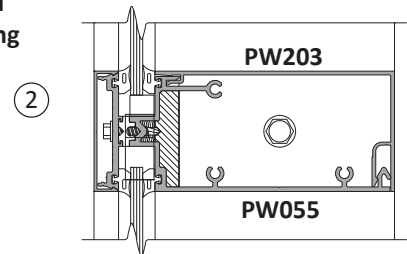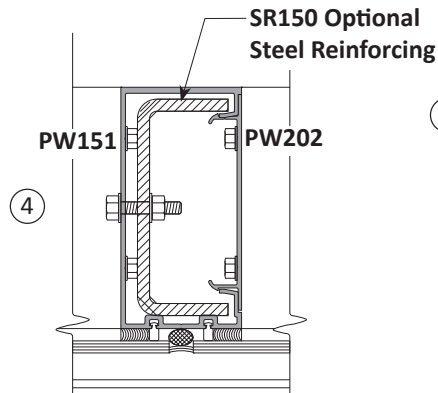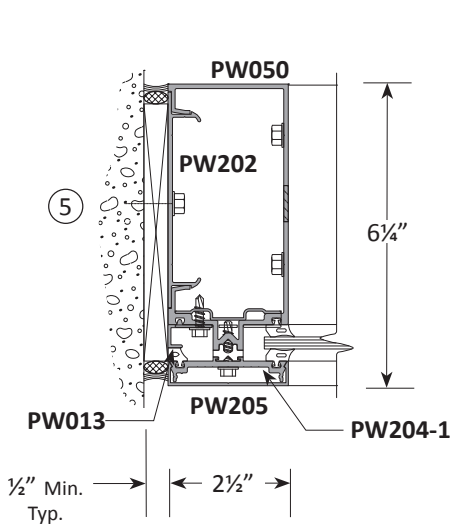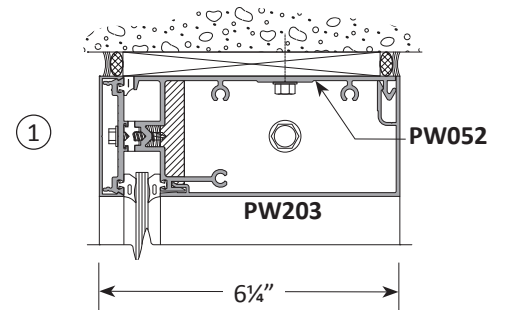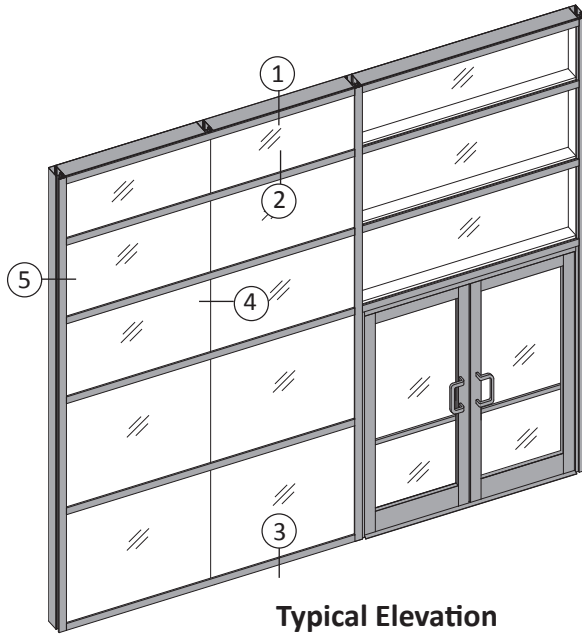

PW250·2½" x 6¼"

Curtain Wall

Entrance Framing

Scale: 3" = 1'-0"

